

20位日式

转换端子模块

S032

20 bit terminal block S032


● 特点

Features

本产品为20P连接器对应20P端子连接；
可对应市面上所有带20P MIL插头的PLC连接。
业界最小空间设计。

This product is a 20 pin terminal connection for 20 pin connector;
Suitable for all 20 pin terminal connections.
The industry's smallest space design.

类似产品 Similar products



● 部品详细参数

Pats detailed pameters

MIL 插孔连接器	主体材料 Body Material	PBT V-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66 V-0防火等级	认证 Authenticate	UL, CE, RoHS
	端子材料 Terminal Material	铜钢	额定电流 Rated current	10A
	电镀层 Plating	镀锡	扭矩 Torque	0.4NM(3.9lb-in)
端子主体	主体材料 Body Material	PA 66 V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

● 发货日期

Ship Date

17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1~8 pcs	9个以上 More than 9pcs
	次日（当日）发货 1~2 day	另定发货时间 Agreed by both parties

- 1.最小起订量1个正常交期7~10天；
- 2.特殊产品交期20天以上；
- 3.非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
- 2: more than 20 days for customized models
- 3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品



Related products

L110-2
L118-1 L118-9

注：见本册缆线系列

● 剥线长度

Wire stripping Recommendation

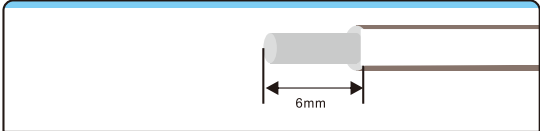

● 输入侧额定值/性能

Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm² Following / AWG16


输入/输出侧对应

Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Manufacturers	PLC Module
	OMRON	CJ1W-MD232 CJ1W-MD233 FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C FX2NC-16EXL-C FX2NC-16EYT FX2NC-17EYT-C FX2N-10PG FX2N-10GM FX2N-20GM
输出侧对应 Corresponding output Devices	Servo motor control signal line circuit	


外形图

Dimensions

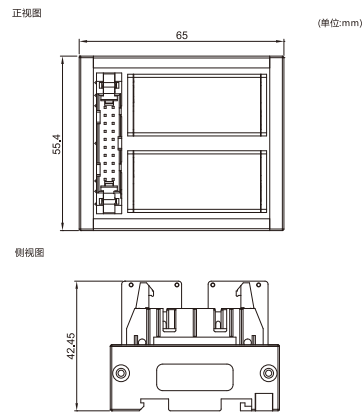


配线图

Wiring Diagram



压着端子

Crimping Terminal



- 用2个M4的螺丝可固定在零件安装的地方，建议使用M4X16的螺丝，螺纹孔深3mm以上
- 可安装在标准35mm的DIN导轨上
- Screw Mounting: use M4*16 screw, screw hole depth≥ 3mm.
- DIN Rail Mounting: Standard 35mm DIN RAIL.